



SORTING GRAPPLE MB-G350 S4

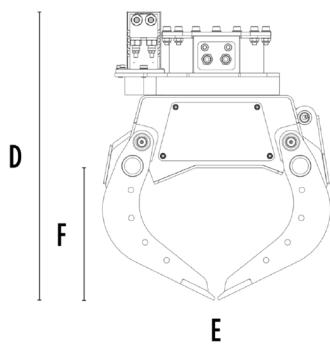

SPECIFICATIONS

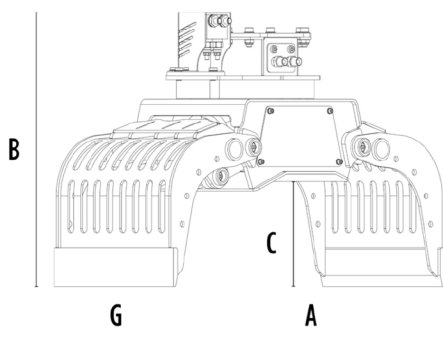

Recommended excavator	ton	1,3 - 2,6
Weight	ton	0,085
Capacity (claws closed)	m³	0,03
Rotation	Degree	360°
Oil pressure (rotation)	bar	130 - 170
Oil flow rate (rotation)	l/min	5 - 10
Oil pressure (opening - closing)	bar	180 - 220
Oil flow rate (opening - closing)	l/min	15 - 20
Size A	mm	795
Size B	mm	570
Size C	mm	233
Size D	mm	615
Size E	mm	490
Size F	mm	283
Size G	mm	350

OPTIONAL ACCESSORIES

Clam shell kit	Serrated side plate kit
Serrated side profile kit	12 V Electrical Kit (for 2 hose functionality)
24 Month Warranty	

APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Urban construction
sites



Maintaining landscape
and agricultural areas



Forest maintenance

