
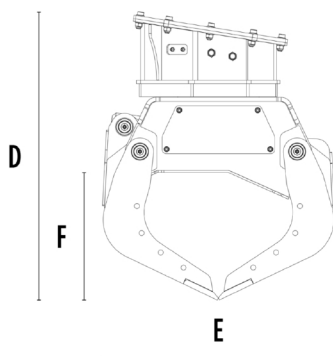


SORTING GRAPPLE MB-G400 S4

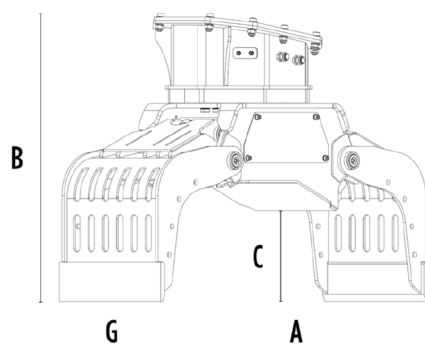

SPECIFICATIONS

Recommended excavator	ton	2,4 - 4
Weight	ton	0,2
Capacity (claws closed)	m³	0,07
Rotation	Degree	360°
Oil pressure (rotation)	bar	130 - 170
Oil flow rate (rotation)	l/min	8 - 12
Oil pressure (opening - closing)	bar	180 - 220
Oil flow rate (opening - closing)	l/min	20 - 25
Size A	mm	1050
Size B	mm	780
Size C	mm	330
Size D	mm	825
Size E	mm	675
Size F	mm	375
Size G	mm	400

OPTIONAL ACCESSORIES

Clam shell kit	Serrated side plate kit
Serrated side profile kit	12 V Electrical Kit (for 2 hose functionality)
24 Month Warranty	

APPLICATION AREAS



Demolitions



Urban construction
sites



Road works



Maintaining landscape
and agricultural areas



Tunnels



Forest maintenance



Enclosed spaces



Pipelines