



SHAFTS SCREENER MB-HDS207

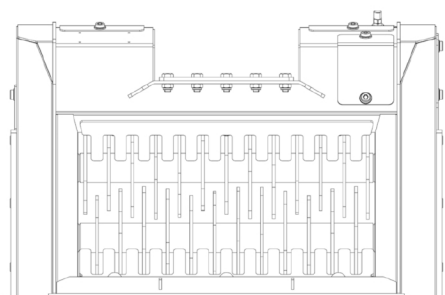

A

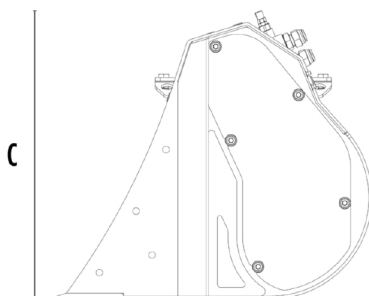

B

SPECIFICATIONS



Recommended excavator

ton

1,3 - 2,8



Recommended backhoe loader

ton

3 - 4*

Weight

ton

0,098

Load capacity

m³

0.05

Pressure

bar

200 - 220

Back pressure

bar

< 20

Oil flow rate**

l/min

25 - 35

Size A

mm

740

Size B

mm

545

Size C

mm

495

* Only compatible with the posterior boom of a Backhoe.


** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT

ADJUSTMENT*

APPLICATION



RQ8 Sifting kit

8 mm

Sifting damp/dry soil

RQ15 Sifting kit

15 mm

Soil Aeration



RM Mixer kit

Coal reduction
Soil Aeration
Compost Aeration
Glass reduction
Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

Load capacity increase kit

Shaft holder

24 Month Warranty

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material
recycling



Excavations



Urban construction
sites



Foundries



Maintaining landscape
and agricultural areas

