



SHAFTS SCREENER MB-HDS314



A

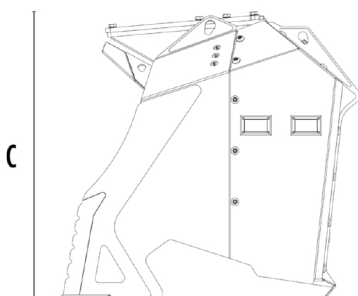

B



SPECIFICATIONS

	Recommended excavator	ton	13 - 20
	Recommended loader*	ton	9 - 14
	Weight	ton	1,4
	Load capacity	m ³	0.9
	Pressure	bar	230 - 280
	Back pressure	bar	< 20
	Oil flow rate**	l/min	100 - 160
	Size A	mm	1430
	Size B	mm	1350
	Size C	mm	1250

* Please verify machine's Rated Operating Capacity.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit	8 mm	Sifting damp/dry soil Soil Aeration
RQ20 Sifting kit	20 mm	
RQ50 Sifting kit	50 mm	
RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
RE16 Fine sifting kit	16 mm	
RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines


Inert material
recycling


Excavations


Urban construction
sites


Foundries


Maintaining landscape
and agricultural areas