



SHAFTS SCREENER MB-HDS320

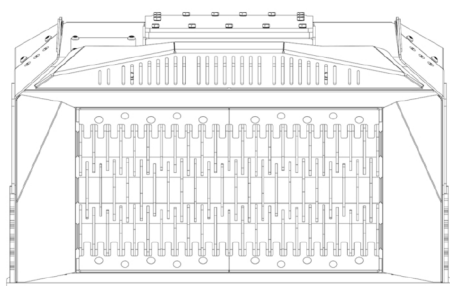

A



C

B



SPECIFICATIONS



Recommended excavator

ton

18 - 24



Recommended loader*

ton

11 - 14

Weight

ton

2,1

Load capacity

m³

1,35

Pressure

bar

250 - 300

Back pressure

bar

< 20

Oil flow rate**

l/min

120 - 160

Size A

mm

2050

Size B

mm

1350

Size C

mm

1250

* Please verify machine's Rated Operating Capacity.


** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT

ADJUSTMENT*

APPLICATION



RQ8 Sifting kit

8 mm



RQ20 Sifting kit

20 mm



RQ50 Sifting kit

50 mm



RM Mixer kit

Coal reduction
Soil Aeration
Compost Aeration
Glass reduction
Drywall reduction


RE8 Fine sifting kit

8.5 mm



RE16 Fine sifting kit

16 mm

Sifting damp/dry soil



RC Compost kit

36.5 mm

Shredding foliage and small branches
Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

APPLICATION AREAS



Road works



Quarry



Mines



Tunnels



Enclosed spaces



Pipelines


Inert material
recycling


Excavations


Urban construction
sites


Foundries


Maintaining landscape
and agricultural areas