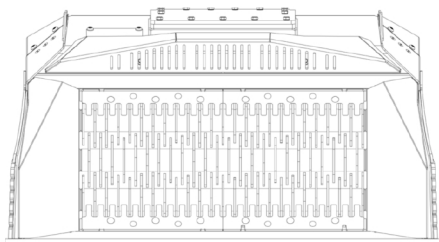
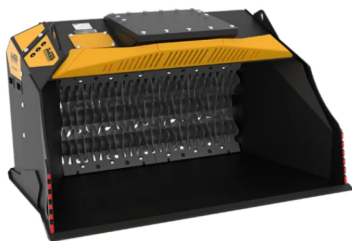
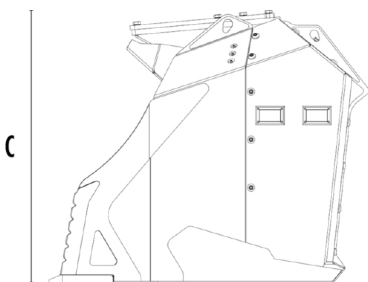


SHAFTS SCREENER MB-HDS323


A

B


SPECIFICATIONS

	Recommended excavator	ton	22 - 35
	Recommended loader*	ton	12 - 16
	Weight	ton	2,4
	Load capacity	m³	1.65**
	Load capacity with coal capacity increase kit	m³	2.00 - 2.40**
	Pressure	bar	250 - 300
	Back pressure	bar	< 20
	Oil flow rate***	l/min	120 - 160
	Size A	mm	2330
	Size B	mm	1500
	Size C	mm	1250

* Please verify machine's Rated Operating Capacity.

** The value of the load capacity varies according to the type of material being processed.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit	8 mm	Sifting damp/dry soil Soil Aeration
RQ20 Sifting kit	20 mm	
RQ50 Sifting kit	50 mm	
RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
RE16 Fine sifting kit	16 mm	
RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

APPLICATION AREAS



Road works



Quarry



Mines



Tunnels



Enclosed spaces



Pipelines



Inert material
recycling



Excavations



Urban construction
sites



Foundries



Maintaining landscape
and agricultural areas