



SHAFTS SCREENER MB-HDS412

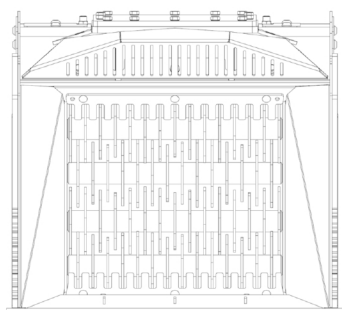

A

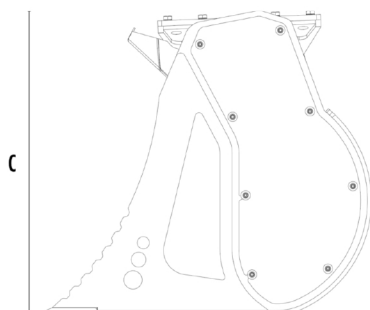

B








SPECIFICATIONS



Recommended excavator	ton	10 - 14
Weight	ton	1,2
Load capacity	m³	0.55
Pressure	bar	230 - 280
Back pressure	bar	< 20
Oil flow rate*	l/min	90 - 150
Size A	mm	1250
Size B	mm	1220
Size C	mm	1110

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 Q8 Sifting kit  Q20 Sifting kit  Q50 Sifting kit	8 mm 20 mm 50 mm	Sifting damp/dry soil Soil Aeration
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit  RE16 Fine sifting kit	8.5 mm 16 mm	Sifting damp/dry soil
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
--------------	-------------------

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material
recycling



Excavations



Urban construction
sites



Foundries



Maintaining landscape
and agricultural areas

