

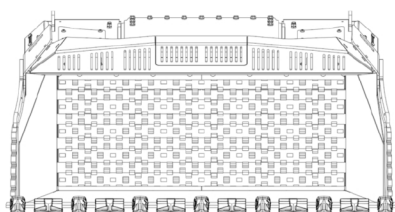


SHAFTS SCREENER MB-HDS533

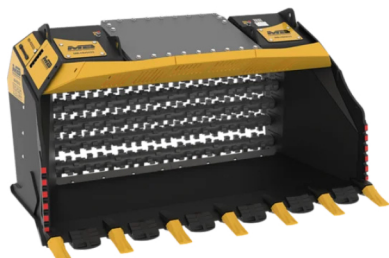

A



B

C

SPECIFICATIONS



Recommended excavator

ton

50 - 80



Recommended loader*

ton

30 - 50

Weight

ton

6,6

Load capacity

m³

3,80

Pressure

bar

250 - 300

Back pressure

bar

< 20

Oil flow rate**

l/min

230 - 250

Size A

mm

3400

Size B

mm

2130

Size C

mm

1770

* Please verify machine's Rated Operating Capacity.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT

APPLICATION



RM Mixer kit

Coal reduction
Soil Aeration
Compost Aeration
Glass reduction
Drywall reduction

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

Hour meter

APPLICATION AREAS



Quarry



Mines



Pipelines



Inert material
recycling



Excavations



Foundries



Maintaining landscape
and agricultural areas