



SCREENING BUCKET MB-S10 S4



A

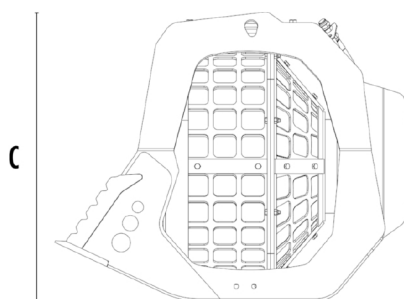

B

SPECIFICATIONS



Recommended excavator

ton

6 - 9



Recommended backhoe loader

ton

8 - 9*

Weight

ton

0,41

Load capacity

m³

0.32

Pressure

bar

130 - 150

Back pressure

bar

< 20

Oil flow rate**

l/min

40 - 60

Basket diameter

mm

800

Basket depth

mm

555

Size A

mm

950

Size B

mm

1220

Size C

mm

1010

* Only compatible with the posterior boom of a Backhoe.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Hour meter

Basket protection kit

24 Month Warranty

APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material
recycling



Excavations



Urban construction
sites



Maintaining landscape
and agricultural areas



Forest maintenance

